


Specifications

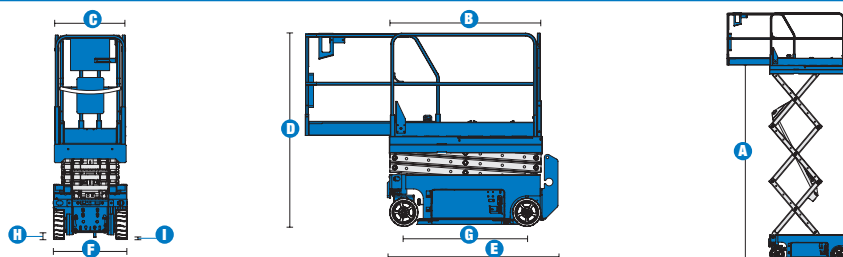

MODELS	GS™-1530		GS™-1532		GS™-1930		GS™-1932	
MEASUREMENTS	Metric	US	Metric	US	Metric	US	Metric	US
Working height maximum*	6.6 m	21 ft	6.6 m	21 ft	7.8 m	25 ft	7.8 m	25 ft
A Platform height maximum	4.6 m	15 ft	4.6 m	15 ft	5.8 m	19 ft	5.8 m	19 ft
B Platform length - outside	1.63 m	5 ft 4 in	1.63 m	5 ft 4 in	1.63 m	5 ft 4 in	1.63 m	5 ft 4 in
extended	2.54 m	8 ft 4 in	2.54 m	8 ft 4 in	2.54 m	8 ft 4 in	2.54 m	8 ft 4 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft
C Platform width - outside	74 cm	2 ft 5 in	74 cm	2 ft 5 in	74 cm	2 ft 5 in	74 cm	2 ft 5 in
Guardrail height	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in	15 cm	6 in	15 cm	6 in
D Height - stowed: folding guardrails	2.06 m	6 ft 9 in	2.06 m	6 ft 9 in	2.10 m	6 ft 11 in	2.10 m	6 ft 11 in
rails folded	1.72 m	5 ft 8 in	1.72 m	5 ft 8 in	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in
E Length - stowed	1.83 m	6 ft	1.83 m	6 ft	1.83 m	6 ft	1.83 m	6 ft
Length - stowed extended	2.72 m	8 ft 11 in	2.72 m	8 ft 11 in	2.72 m	8 ft 11 in	2.72 m	8 ft 11 in
F Width	76 cm	2 ft 6 in	81.3 cm	2 ft 8 in	76 cm	2 ft 6 in	81.3 cm	2 ft 8 in
G Wheelbase	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in
H Ground clearance - centre	6 cm	2.4 in	6 cm	2.4 in	6 cm	2.4 in	6 cm	2.4 in
I - with pothole guards deployed	2 cm	0.75 in	2 cm	0.75 in	2 cm	0.75 in	2 cm	0.75 in

PRODUCTIVITY								
	2/-		2/1		2/-		2/1	
Max platform occupancy (in/out) ¹								
Lift capacity	272 kg	600 lbs	272 kg	600 lbs	227 kg	500 lbs	227 kg	500 lbs
Drive speed - stowed	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%	30%	30%	30%	25%	25%	25%	25%
Turning radius - inside	zero	zero	zero	zero	zero	zero	zero	zero
Turning radius - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Raise / lower speed	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec
Controls	proportional		proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	30x11x20 cm 12x4.5x8 in		30x11x20 cm 12x4.5x8 in		30x11x20 cm 12x4.5x8 in		30x11x20 cm 12x4.5x8 in	

POWER								
Power source	24 V (four 6 V 225 Ah batteries)							
Hydraulic system capacity	14.2 L	3.75 gal	14.2 L	3.75 gal	14.2 L	3.75 gal	14.2 L	3.75 gal

SOUND & VIBRATION LEVELS								
Sound pressure level (ground workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Sound pressure level (platform workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²

WEIGHT***								
	1,257 kg	2,771 lbs	1,269 kg	2,797 lbs	1,476 kg	3,254 lbs	1,503 kg	3,313 lbs

STANDARDS COMPLIANCE CE EN280, PB-10-611-03

¹ Indoor use only for the 30' Series

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-1530 & GS™-1532

- 6.6 m (21 ft) working height
- Up to 272 kg (600 lb) lift capacity

GS™-1930 & GS™-1932

- 7.8 m (25 ft) working height
- Up to 227 kg (500 lb) lift capacity

PRODUCTIVITY

- 1.63 m x 74 cm (64 in x 29 in) steel platform
- Folding rails with half-height swing gate
- 91 cm (3 ft) extension deck
- Dual front wheel drive
- Proportional lift and drive
- Universal 20 amp smart charger
- Rear recessed charger receptacle
- 25% to 30% gradeability
- Platform control with battery charge indicator and diagnostic display
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual brake release
- Swing out components trays
- Solid non-marking tyres
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Certified load sensor

POWER

- 24 V DC (four 6 V 225 Ah batteries)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Power to platform (plug, socket and ground fault interrupt earth leakage on request)
- Dual flashing beacons
- Motion alarm
- Platform work lights*
- Automotive-style horn
- Biodegradable oil

*Available aftermarket only

Enquiries from Europe:

Tel: +31 165 519 361
Fax: +31 165 511 148
Email: AWP-InfoEurope@terex.com

Offices:

France

Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Tel: +49 (0)4221 491 810
Fax: +49 (0)4221 491 820

Spain

Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tel: +46 31 57 51 00
Fax: +46 31 57 51 04

The Netherlands

Tel: +31 165 519 361
Fax: +31 165 511 148

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

Middle East

Tel: +971 4 399 0381
Fax: +971 4 399 0382
Email: AWP.Infome@terex.com

Russia & CIS countries

Tel: +7 495 660 32 30
Fax: +7 495 660 32 29
Email: info@terexus.ru

Corporate Headquarters:

United States

18340 NE 76th Street
P.O. Box 97030
Redmond, WA
USA 98073-9730
Tel: +1 425 881-1800
Fax: +1 425 883-3475

Distributed By: