




SPECIFICATIONS

Size	Metric	British
Max. Working Height A	7.80m	25ft 7in
Max. Platform Height B	5.80m	19ft
Overall Length C	1.86m	6ft 1in
Overall Width D	0.76m	2ft 6in
Overall Height(Rails Up) E	2.15m	7ft 1in
Overall Height(Rails Down) F	1.83m	6ft
Platform Size(Length×Width)	1.67m×0.74m	5ft 6in×2ft 5in
Platform Extension Size G	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.09m/0.016m	4in/1in
Wheelbase H	1.36m	4ft 6in
Turning Radius(Inside/Outside)	0m/1.64m	0in/5ft 5in
Tyres	Φ323×100mm	Φ323×100mm

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	4.5km/h	2.80mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	21/25sec	21/25sec

Weight		
Overall Weight	1630kg	3593lb

Power		
Hydraulic Tank	6.5L	1.7gal
Lead-acid Battery	24V/185Ah	24V/185Ah
Lithium Battery	24V/180Ah	24V/180Ah
Charger	24V/30A	24V/30A
Driving Motor	2×15VAC/0.5kW	2×15VAC/0.5kW
Lifting Motor	16VAC/3kW	16VAC/3kW

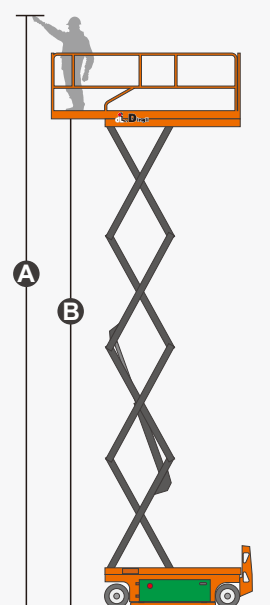

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>