


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	9.90m	32ft5.8in
Max. Platform Height B	7.90m	25ft11in
Overall Length(With Outriggers) C	3.30m	10ft9.9in
Overall Width D	1.45m	4ft9.1in
Overall Height(Rails Up) E	2.54m	8ft4.0in
Overall Height(Rails Down) F	1.77m	5ft9.7in
Platform Size(Length×Width)	2.73m×1.40m	8ft11in × 4ft7.1in
Platform Extension Size G	1.2m	3ft11in
Ground Clearance	0.24m	9.4in
Wheelbase H	2.00m	6ft6.7in
Turning Radius(Inside/Outside)	2.70m/4.70m	8ft10in/15ft5in
Tyres	23×8.5-15	23×8.5-15

Performance		
S.W.L	300kg	661lb
S.W.L On Extension	120kg	264lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	35%	35%
Travel Speed(Stowed)	5.20km/h	3.23mph
Travel Speed(Raised)	0.60km/h	0.37mph
Max. Working Slope	2°/4°	2°/4°
Up/Down Speed	29/40sec	29/40sec

Weight		
Overall Weight	2970kg	6547lb

Power		
Range Extended Engine KUBOTA Z482(9.8kW/3600rpm) KUBOTA Z482(9.8kW/3600rpm)		
Diesel Tank	55L	14gal
Hydraulic Tank	58L	15gal
Lithium Battery	48V/320Ah	48V/320Ah
Charger	48V/60A	48V/60A
Lifting Motor	48VDC/14kW	48VDC/14kW

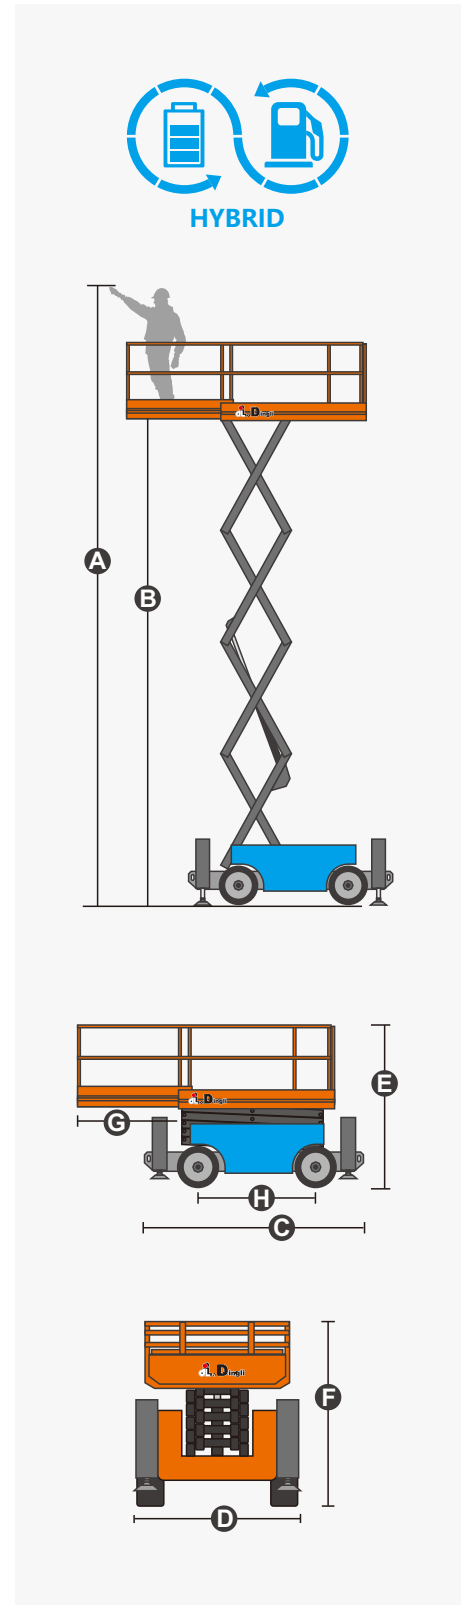

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://www.dingliglobal.com/>