




SPECIFICATIONS

Size	Metric	British
Max. Working Height A	17.20m	56ft 5in
Max. Platform Height B	15.20m	49ft 10in
Overall Length C	3.36m	11ft
Overall Width D	1.25m	4ft 1in
Overall Height(Rails Up) E	3.24m	10ft 8in
Overall Height(Rails Down) F	2.47m	8ft 1in
Platform Size(Length×Width)	3.04m×1.17m	10ft × 3ft 10in
Platform Extension Size G	1.20m	3ft 11in
Ground Clearance(Stowed/Raised)	0.15m/0.025m	6in/1in
Wheelbase H	2.49m	8ft 2in
Turning Radius(Inside/Outside)	0.60m/3.00m	2ft/9ft 10in
Tyres	22×9×16	22×9×16

Performance		
S.W.L	500kg	1102lb
S.W.L On Extension	500kg	1102lb
Max. Occupants (Indoor/Outdoor)	2/0	2/0
Gradeability	30%	30%
Travel Speed(Stowed)	4.5km/h	2.80mph
Travel Speed(Raised)	0.4km/h	0.25mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	65/68sec	65/68sec

Weight		
Overall Weight	6280kg	13845lb

Power		
Hydraulic Tank	45L	11.7gal
Battery	48V/320Ah	48V/320Ah
Charger	48V/60A	48V/60A
Driving Motor	2×32VAC/3.3kW	2×32VAC/3.3kW
Lifting Motor	48VDC/10.0kW	48VDC/10.0kW

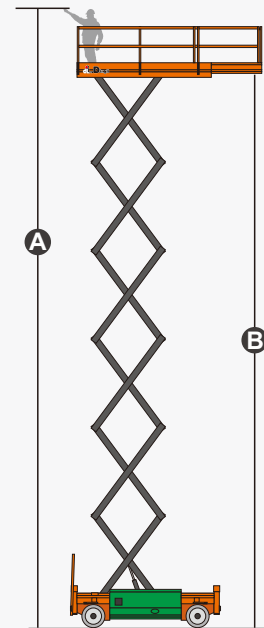

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Solid Rubber Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Brake System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>