

JCPT2223RTB

Self-Propelled Rough-Terrain Scissor Lifts



dL Dingli JCPT2223RTB



	S.W.L	750kg
	S.W.L On Extension	750kg
	Max.Occupants	4
	A Max.Working Height	22.00m
	B Max.Platform Floor Height	20.00m
	C Overall Length	4.95m
	D Overall Width	2.46m
	E Overall Height(Rails Up)	3.86m
	Overall Height(Rails Down)	3.0m
	Platform Size(Length/Width F)	4.59m×2.25m
	G Platform Extension Size	2.70m
	Ground Clearance	0.4m
	Wheelbase	3.3m
	Turning Radius(Inside/Outside)	1.25m/3.40m
	Engine	
	DEUTZ D2.9L4	36.4kW/2600rpm
	Travel Speed(Stowed)	4.5km/h
	Travel Speed(Raised)	0.4km/h
	Up/Down Speed	75/90sec
	Gradeability	30%
	Max.Working Slope	2°/3°
	Hydraulic Tank	150L
	Diesel Tank	100L
	Tyres	36×14-20
	Weight	13000kg

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- 4WD
- 4WS
- Self-leveling Hydraulic Outriggers
- Automatic Brake System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Brackets
- Folding Guardrails
- Automatic Single Roll Out Deck
- Flashing Beacon
- Emergency Stop Button
- Anti-restart Engine Protection
- Hydraulic Oil Cooler

Options

- Overload Sensor With Alarm
- AC power On The Platform
- Hydraulic Generator
- Hydraulic Welder
- Hydraulic Compressor
- Hydraulic Water Pump
- Platform Work Lights
- Non Marking Tyre

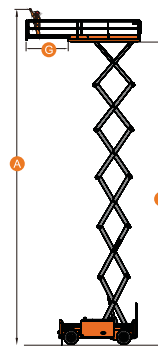

Multiple steering modes



Flashing Beacon



Easy Maintenance



Gradeability



Extended Platform



Folding Guardrails



Full Stroke Traveling



Automatic Leveling Outriggers