


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	12.00m	39ft 4in
Max. Platform Height B	10.00m	32ft 10in
Overall Length(Without Outriggers)	3.19m	10ft 6in
Overall Length(With Outriggers) ©	3.84m	12ft 7in
Overall Width ()	1.76m	5ft 9in
Overall Height(Rails Up)	2.59m	8ft 6in
Overall Height(Rails Down)	1.82m	6ft
Platform Size(Length×Width)	2.88m×1.52m	9ft 5in × 5ft
Platform Extension Size ©	1.43m	4ft 8in
Ground Clearance	0.24m	9in
Wheelbase (1)	2.29m	7ft 6in
Turning Radius(Inside/Outside)	2.15m/4.85m	7ft 1in/15ft 11in
Tyres	26×12-16.5	26×12-16.5

Performance		
S.W.L	454kg	1000lb
S.W.L On Extension	136kg	299lb
Max. Occupants	4	4
Gradeability	40%	40%
Travel Speed(Stowed)	6.00km/h	3.73mph
Travel Speed(Raised)	0.45km/h	0.28mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	40/46sec	40/46sec

Weight			
Overall Weight(Without Outriggers)	4135kg	9116lb	
Overall Weight(With Outriggers)	4400kg	9700lb	

71L	18.7gal
48V/320Ah	48V/320Ah
48V/35A	48V/35A
2×32VAC/3.3kW	2×32VAC/3.3kW
48VDC/8.0kW	48VDC/8.0kW
	48V/320Ah 48V/35A 2×32VAC/3.3kW

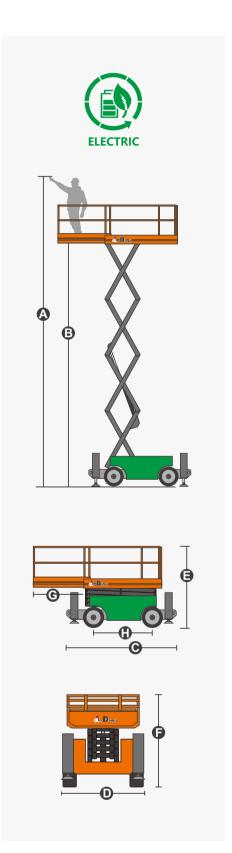



Self-propelled Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











