


SPECIFICATIONS

| Size | Metric | British |
|--------------------------------|-------------|------------------|
| Max. Working Height | 22.21m | 72ft 10in |
| Max. Platform Height | 20.21m | 66ft 4in |
| Max. Operating Range(+0.6m) | 13.32m | 43ft 8in |
| Max. Platform Range | 12.72m | 41ft 9in |
| Overall Length(Stowed) | 9.55m | 31ft 4in |
| Overall Length(Transport) | 7.71m | 25ft 4in |
| Overall Width(Stowed) | 2.33m | 7ft 8in |
| Overall Height(Stowed) 😉 | 2.55m | 8ft 4in |
| Overall Height(Transport) | 2.57m | 8ft 5in |
| Platform Size(Length × Width) | 1.83m×0.79m | 6ft×2ft 7in |
| Turntable Tailswing | 0.93m | 3ft 1in |
| Ground Clearance ① | 0.31m | 1ft |
| Wheelbase 🖪 | 2.30m | 7ft 7in |
| Turning Radius(Inside/Outside) | 2.92m/4.49m | 9ft 7in/14ft 9in |
| Tyres | 315/55 D20 | 315/55 D20 |
| Max. Up And Over Clearance | 8.13m | 26ft 8in |
| Max. Down Probing Depth | 1.77m | 5ft 10in |

| 250kg | 551lb |
|----------------|---|
| 2 | 2 |
| 35% | 35% |
| 6.0km/h | 3.7mph |
| 1.1km/h | 0.7mph |
| X-5°/Y-5° | X-5°/Y-5° |
| 360°Continuous | 360°Continuous |
| 180° | 180° |
| 132° | 132° |
| | 2 35% 6.0km/h 1.1km/h X-5°/Y-5° 360°Continuous 180° |

| Weight | | | |
|----------------|--------|---------|--|
| Overall Weight | 9500kg | 20944lb | |

| Power | | |
|----------------|------------|------------|
| Battery | 48V/375Ah | 48V/375Ah |
| Charger | 48VDC/60A | 48VDC/60A |
| Driving Motor | 34VAC/9kW | 34VAC/9kW |
| Lifting Motor | 34VAC/13kW | 34VAC/13kW |
| Hydraulic Tank | 145L | 38gal |
| | | |

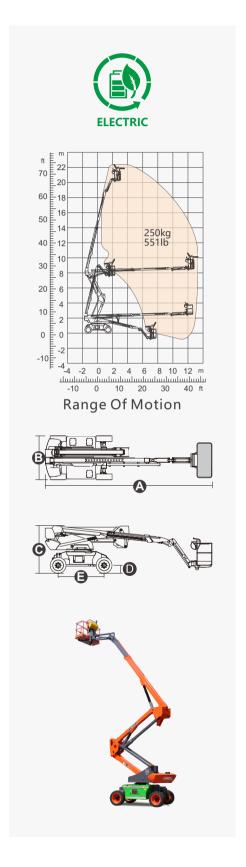





FEATURES

Standard Items

- 1.50m (4ft 11in) Jib
- Front Oscillating Axle
- Two-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- AC Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle
- For Construction Machinery
- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive • Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Battery 48V/375Ah
- Driving Motor 9kW 4834rpm
- Lifting Motor 13kW 1855rpm











Articulated Boom-BA

Working Height-22m

Jib

Electric-E

Rough Terrain-RT



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











